


## COBALT SERIES

Single Stage Turbo Sludge Pump



Type:	SSTSP100
Motor Revolution:	1450 rpm
Pump Revolution:	1950 rpm
Pressure:	7 bar max
Flow rate:	115 m <sup>3</sup> /h max
Seal Type:	Mechanical Seal
Cooling Type:	Water Cooling
Motor Size:	30 Kw max
Protection Class:	IP 65
Suction:	DN100, Pn10
Discharge:	Dn80, Pn10
Casing Material:	Gg22
Impeller Material:	AISI 4140
Impeller Diameter:	Ø290mm (2pcs)
Inner Coating:	Rubber 65-70
Weight:	610 Kg
Excitation System:	Hooped

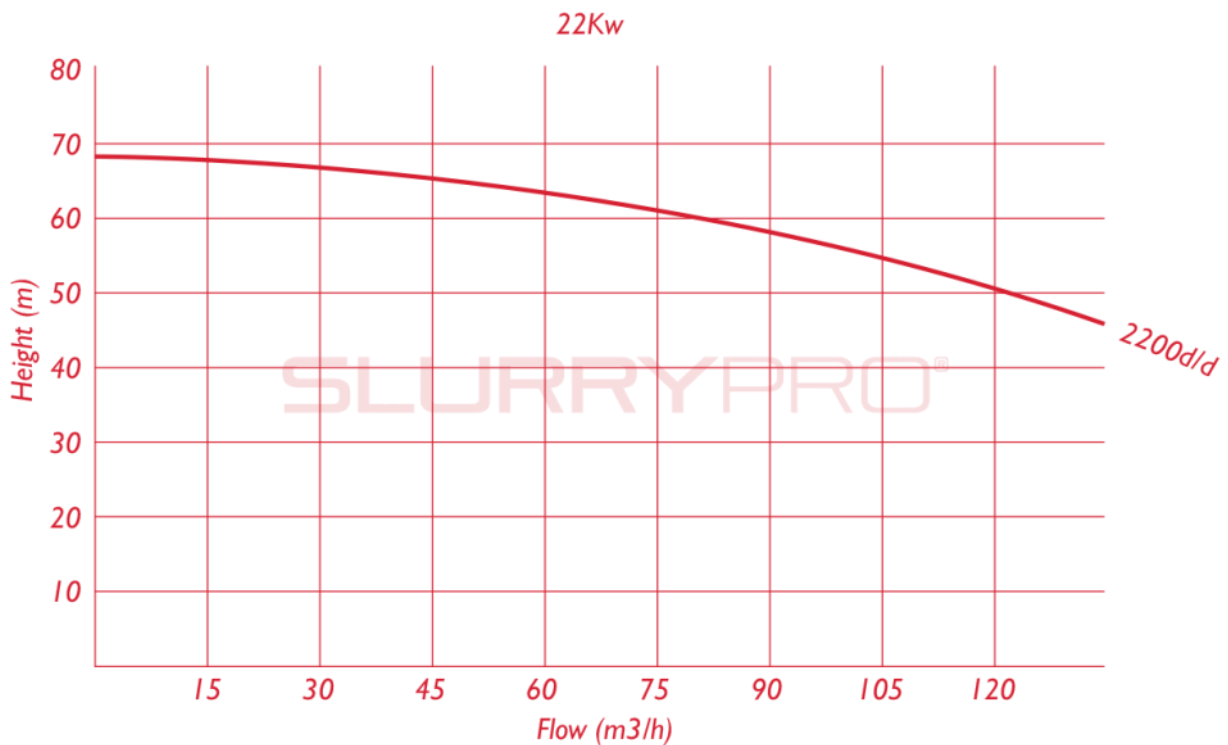

**NOTE** This information is for guidance / reference only. For application specific drawings and curves, please contact your nearest authorised distributor at [slurrypro.com](http://slurrypro.com). 03.05.18.